


# TP1200

## High Thermally Conductive Gap Filler Pad

TP1200 is a 12.0W/m·K, high thermal conductive gap filler pad that low thermal resistance and excellent electrical insulation at low compression. It can work stably at -40°C~150°C and meet UL94 V-0 flame retardant grade.

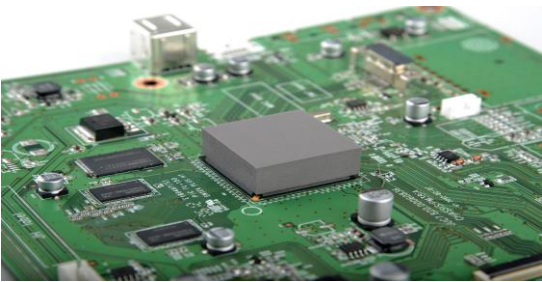

### Features

- 12.0W/m·K
- High electrical insulation
- Wide usage temperature
- High compression ratio

### Typical Applications

- VRMs
- ASICs and DSPs
- Network Communication Devices
- BGAs
- CD ROM/DVD ROM

Typical Properties		
Properties	Attribute	Test Method
Color	Grey	Visual
Thickness(mm)	0.5 to 5.0	ASTM D374
Density (g/cc)	3.3	ASTM D792
Hardness(Shore OO)	65	ASTM D2240
Usage Temperature (°C)	- 40~150	-
Flammability	V-0	UL 94
Shelf Life(month)	12	Temperature <40°C avoid extrusion and exposure to the sun
Electrical		
Breakdown Voltage (kV/mm)	> 5.0	ASTM D149
Volume Resistivity (Ω.cm)	10 <sup>12</sup>	ASTM D257
Dielectric Constant@1MHz	7.0	ASTM D150
Thermal		
Thermal Conductivity (W/m-K)	12.0	ISO22007-2

